
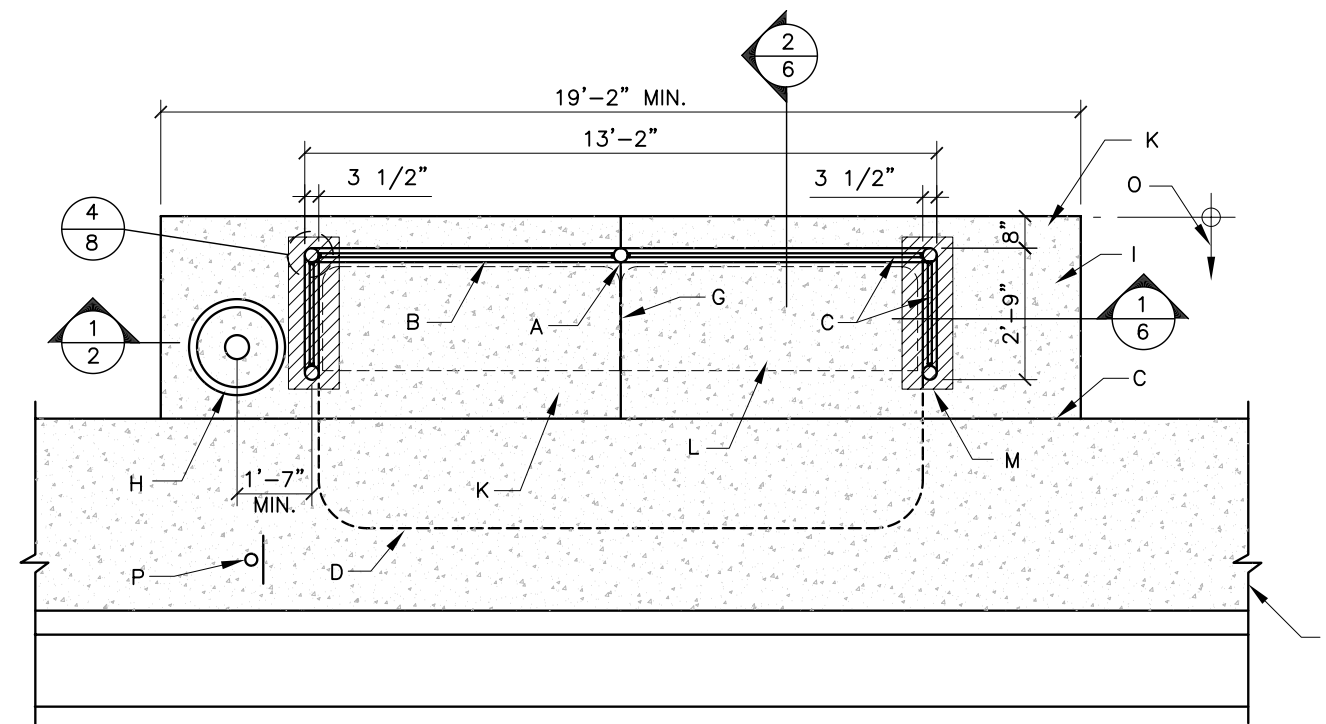
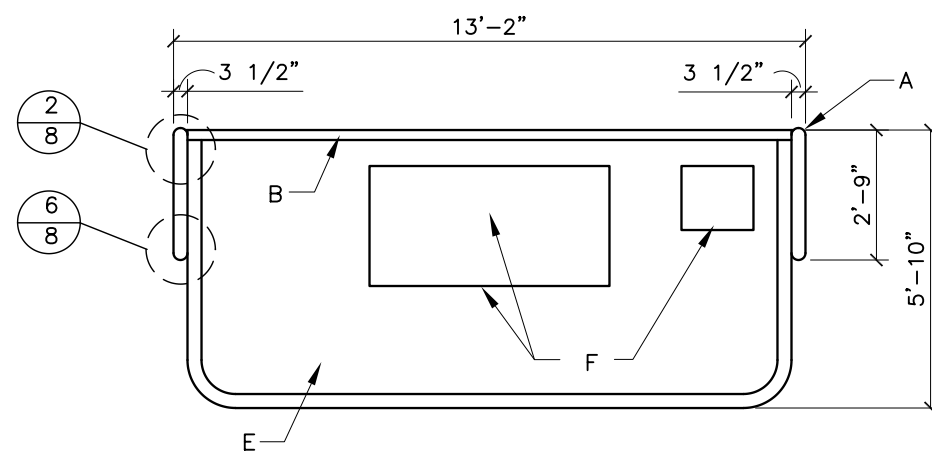


CONSTRUCTION NOTES:


- A. FRAME 3 1/2" O.D. STEEL PIPE, COPE & WELD PIPE, GRIND SMOOTH.
- B. 2 1/2" O.D. STEEL PIPE COPE & WELD PIPE TO CHASSIS GRIND SMOOTH.
- C. 16 ga. PERFORATED STEEL PANEL, RIVETS OR TEMPER PROOF SCREWS FASTENED AT 8"o.c. TO 1/2" x 1" CHANNEL.
- D. ROOF LINE ABOVE.
- E. ROOF: HIGH STRENGTH F.R.P. SMOOTH SURFACE TOP AND BOTTOM. FASTEN TO 1/2" x 2" CHANNEL WITH RIVETS OR TEMPER PROOF SCREWS @ 8"o.c. PAINT TO MATCH SHELTER.
- F. OPTIONAL FLUORESCENT DC LIGHT WITH PHOTO VOLTAIC SOLAR COLLECTOR AND BATTERY IN VENTED SECURITY HOUSING. LACOR MODEL SR100 OR EQUAL. LACOR STREET SCAPES, PHOENIX, ARIZONA, (602) 371-3110.
- G. 1/2" EXPANSION JOINT.
- H. TRASH RECEPTACLE (SEE STD. DWG. 2535.10).
- I. 4" SLAB WITH 4x4 - W4.0 WWF, USE 10' DEEP TURNDOWN AT PERIMETER, BROWN FINISH.
- J. EXISTING SIDEWALK & CURB (WIDTH VARIES). (SHADED)
- K. SLOPE SLAB AT 1:50 MATCH ELEVATION OF SIDEWALK.
- L. BENCH (SEE DETAILS, STD. DWG. 2535.09).
- M. THICKENED SLAB (TYP.) 
- N. 3/4" CHAMFER EDGE.
- O. R.O.W. VARIES. SHELTER MUST BE CONSTRUCTED WITHIN R.O.W.
- P. BUS STOP SIGN. (TYP.)



PLAN WITH SIDEWALK



ROOF PLAN

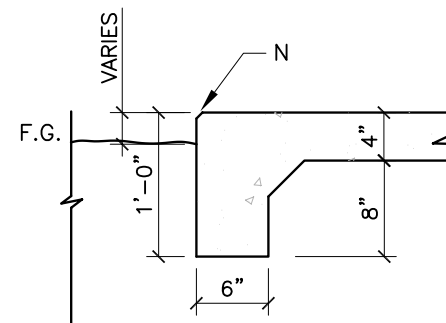

TURN DOWN DETAIL

REVISIONS	CITY OF ALBUQUERQUE
	<p>BUS SHELTER 'C'</p> <p>PLAN & ROOF PLAN</p> <p>(W/ SIDEWALK)</p> <p>DWG. 2535.02 JANUARY 2003</p>